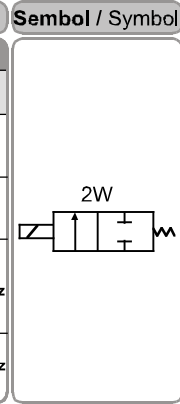
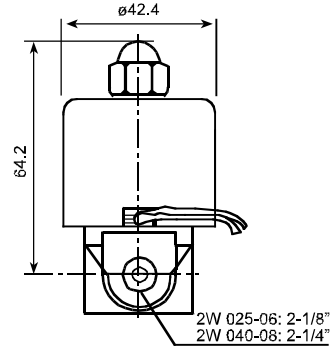
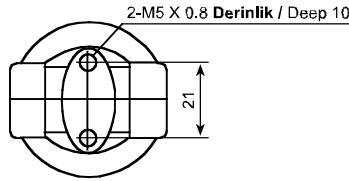
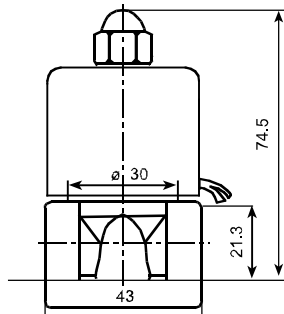
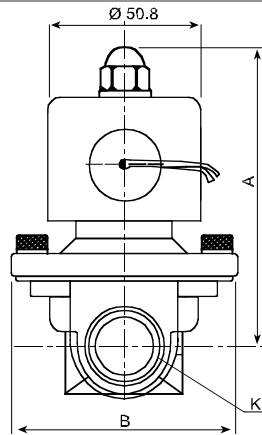
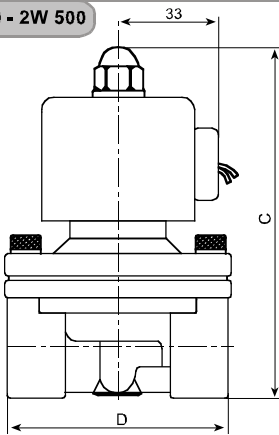


**2W Serisi Solenoid Valfler / 2W Series Solenoid Valves**


Sipariş Kodu / Ordering Code			
2W	025	06	AC110V
Model / Model	Orifis Çapı / Orifis Size	Bağlantı Ölçüsü / Port Size	Voltaj / Voltage
2V: 2 Yol 2 Konumlu Solenoid Valf 2 Port 2 Position Solenoid Valve	025: 2.5 mm	06: 1/8"	DC12V
	040: 4.0 mm	08: 1/4"	
	160: 16 mm	10: 3/8"	
	200: 20 mm	15: 1/2"	DC24V
	250: 25 mm	20: 3/4"	
	350: 35 mm	25: 1"	AC110V 50Hz
	400: 40 mm	35: 1 1/4"	
	500: 50 mm	40: 1 1/2"	AC220V 50Hz
		50: 2"	


**Özellikler / Specification**

Model / Model	2W
Akışkan / Fluid	Hava, Su, Yağ / Air, Water, Oil
Kumanda / Acting	Direkt Kumanda / Direct Acting
Tip / Type	Normalde Kapalı / Normally Closed
Çalışma Basıncı / Operating Pressure	0 ~ 10 bar ( 0 ~ 1.0 MPa ) ( 0 ~ 142 Psi )
Test Basıncı / Proof Pressure	15.0 bar ( 1.5 MPa ) ( 213 Psi )
Sıcaklık / Temperature (C°)	- 10 ~ 80
Voltaj Aralığı / Voltage Range	AC: -20% ~ +10% DC: -15% ~ +10%
Gövde Malzemesi / Material of Body	Pirinç / Brass

**Teknik Çizimler / Technical Drawings**
**2W 025 - 2W 040**

**2W 160 - 2W 500**


Tip / Type	A	B	C	D	K
2W160-15	93	57	106.5	69	G 1/2
2W200-20	100	57	116.4	73	G 3/4
2W250-25	105	73.4	126	99	G 1
2W350-35	142	95	172	123	G 1 1/4
2W400-40	142	95	172	123	G 1 1/2
2W500-50	172	123	209	168	G 2